

Contents


- 3 Contents
- 3 Intended Use
- 4 Compatibility
- 4 Warnings and Safety Precautions
- 5 Installation
- 6 Initial Connection
- 7 Notes on Installation
- 33 Declaration of Conformity

Intended Use

This USB interface cable is a solution that enables connection of a balance to a computer via the USB universal serial bus port. The USB interface is implemented as a virtual serial interface over RS-232 (virtual COM port).
For the application of the cable, see the following sections:

Installation

- Disconnect the balance/ scale power supply.
● Unplug the AC adapter from the wall socket (mains).

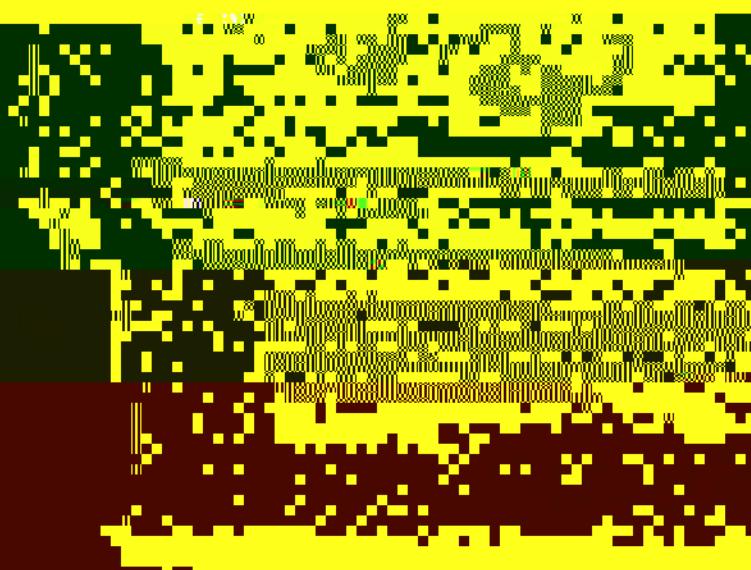

Initial Connection

Installing the Drivers for the USB Interface

1. Place the enclosed CD in your computer's CD-ROM drive.
2. Each version of Windows may have a different path to the setup program. In most cases, you will find it in the "My Computer" window under "CD/DVD Drives".

Notes on Installation

The following installation instructions can be found
on the enclosed CD-ROM:

- for Windows® 98SE: see "w98guide.htm"
- for Windows® ME: see "wmeguide.htm"
- for Windows® 2000: see "w2kguide.htm"
- for Windows® XP: see "wxpguide.htm"


Changing the Port Number

If you use the USB interface via a hub, you may



Plug & Play Mode with Autoprint (SBI)

To use the autoprint function, you need to deactivate the "Print" mode. Then the printer is forced to the same

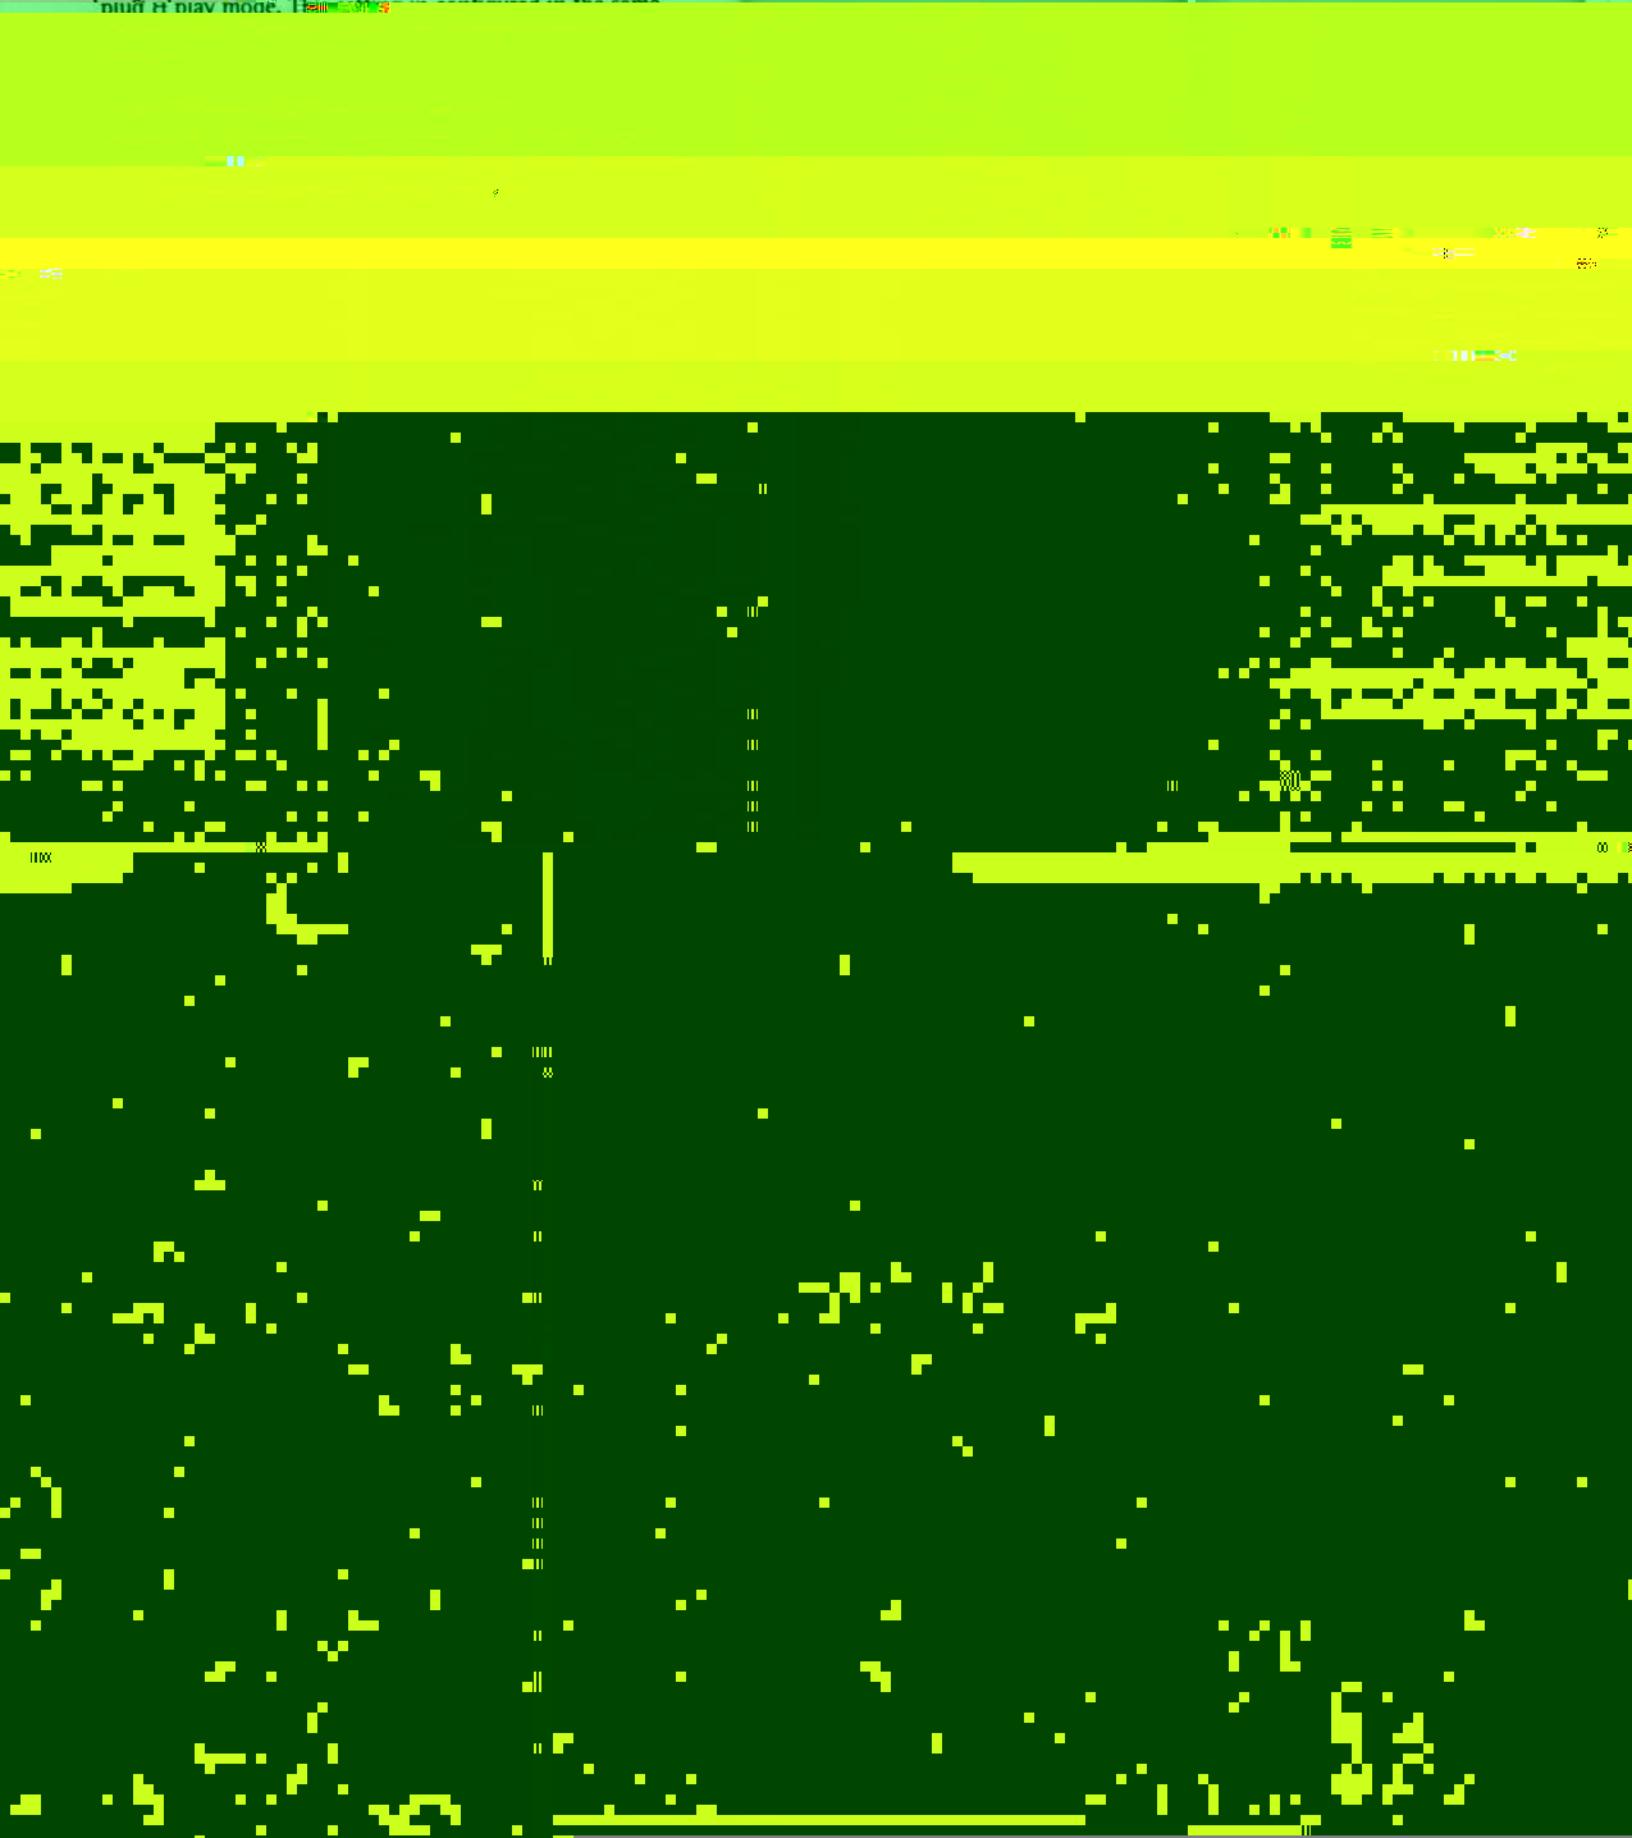

Sartorius AG
Weender Landstrasse 94–108
37076 Goettingen, Germany

Phone +49.551.308.0
Fax +49.551.308.3289
www.sartorius.com

Copyright © Sartorius AG, Goettingen, Germany.

All rights reserved. No part of this publication may be
reprinted or translated in any form or by any means without
written permission from the publisher.



— ■ —



© Sartorius